

Rock Mechanics and Rock Engineering manuscript No.
(will be inserted by the editor)

Discrete/Finite Element Modelling of Rock Cutting with a TBM Disc Cutter

Carlos Labra · Jerzy Rojek · Eugenio Oñate

Received: date / Accepted: date

Abstract This paper presents advanced computer simulation of rock cutting process typical for excavation works in civil engineering. Theoretical formulation of the hybrid discrete/finite element model has been presented. The discrete and finite element methods have been used in different subdomains of a rock sample according to expected material behaviour, the part which is fractured and damaged during cutting is discretized with the discrete elements while the other part is treated as a continuous body and it is modelled using the finite element method. In this way, an optimum model is created, enabling a proper representation of the physical phenomena during cutting and efficient numerical computation. The model has been applied to simulation of the laboratory test of rock cutting with a single TBM (tunnel boring machine) disc cutter. The micromechanical parameters have been determined using the dimensionless relationships between micro- and macroscopic parameters. A number of numerical simulations of the LCM test in the unrelieved and relieved cutting modes have been performed.

Numerical results have been compared with available data from in-situ measurements in a real TBM as well as with the theoretical predictions, showing quite a good agreement. The numerical model has provided a new insight into the cutting mechanism enabling us to investigate the stress and pressure distribution at the tool-rock interaction. Sensitivity analysis of rock cutting performed for different parameters including disc geometry, cutting velocity, disc penetration and spacing has shown that the presented numerical model is a suitable tool for the design and optimization of rock cutting process.

C. Labra
Particle Analytics Ltd, Edinburgh, UK
E-mail: carlos.labra@particle-analytics.com


J. Rojek
Institute of Fundamental Technological Research, Polish Academy of Sciences, Warsaw, Poland
E-mail: jrojek@ippt.pan.pl

E. Oñate
Centre Internacional de Mètodes Numèrics en Enginyeria (CIMNE), Barcelona, Spain


Keywords rock cutting · disc cutters · TBM · numerical model · discrete/finite element method · simulation

1 Introduction

Variety of rock cutting technologies is used in civil or mining engineering. **Rock cutting consists in fracturing and disintegration of a rock** using different methods and different machines. Tunnel boring machines (TBMs), shown in Fig. 1a, are used to perform rock cutting in excavation of tunnels. In excavation with a TBM, a rock is cut by means of cutter discs (Fig. 1b) installed on a rotating cutter head, which is pressed against the tunnel face.

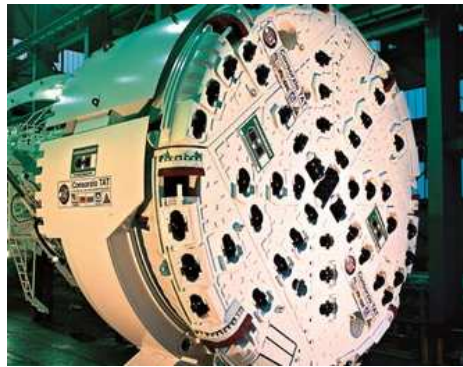

a)

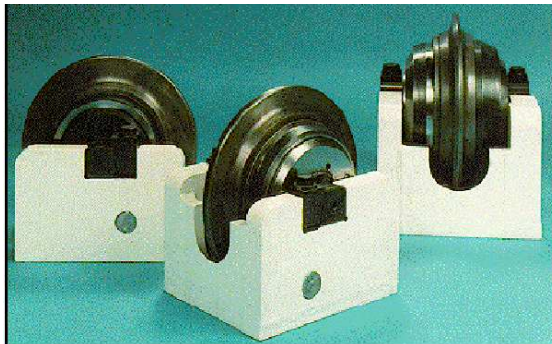

b)

Fig. 1 Tunnel boring machine: a) general view of a TBM cutterhead, b) TBM disc cutters.

TBMs are widely used in various tunnelling projects in civil engineering (road and railway tunnels), mining industry (tunnels for access to underground excavations, conveyance of ore and waste, drainage, exploration, water supply and diversion, etc.) and other geotechnical engineering applications. The use of TBMs is continuously growing mainly due to their efficiency. Nevertheless, there is still a need of improvement of TBM performance depending mainly on rock properties, operational param-

eters (machine trust, penetration and rate of advance) and design of the cutter head design, including design of the disc cutters (Roby et al, 2008) and design of their layout (Huo et al, 2010).

Historically, design of rock cutting tools for the excavation machinery has been based on a combination of the experience of engineers and real size laboratory tests, resulting many times in an inefficient process, and involving high costs for the excavation companies. Different empirical models have been developed for the estimation of the principal parameters involved (Nilsen and Ozdemir, 1993; Rostami et al, 1996). These models are useful in certain cases, nevertheless, their use is restricted by the availability of historical data and range of rock material properties (Ramezanzadeh et al, 2004).

Application of numerical analysis improves the design methodology and allows to obtain more efficiently optimized designs of rock cutting tools and machines. Numerical methods can be used to optimize the TBM cutter layout (Sun et al, 2015) or simulate interaction between TBM components and rock mass (Zhao et al, 2014). The present work is focused on simulation of rock cutting with a single TBM disc cutter. Such an analysis can help the designer to understand better rock cutting mechanisms, to detect the reasons of the cutting tool wear and failure, and finally to improve the cutter design and determine optimum operational parameters. The aim of the analysis is to substitute or at least reduce number of laboratory tests used in the design process of rock cutting tools (Nilsen and Ozdemir, 1993; Rostami and Ozdemir, 1993), and finally speed-up the design process and reduce its costs.

Simulation of excavation processes, in general, and of rock cutting process, in particular, is not an easy task. Continuum-based simulation techniques, such as the finite element method (FEM), encounter serious difficulties in modelling of fracture and fragmentation of a rock material occurring in an excavation process (Jonak and Podgórski, 2001; Yu and Khair, 2007; Shenghua, 2004; Loui and Karanam, 2012). The discrete element method (DEM) employing a discrete material model offers a more realistic way to simulate discontinuous phenomena. The DEM has been successfully applied to simulation of different rock cutting processes by Stavropoulou (2006); Rojek et al (2011); Su and Akcin (2011); Huang et al (2012); Labra et al (2008a); van Wyk et al (2014).

The known disadvantage of the DEM is that it usually requires the use of a large number of elements, which leads to long computation times. This paper put forwards the idea allowing to reduce the computation cost of the DEM simulation of rock cutting by coupling the DEM with the FEM and using them in different subdomains of the cut material according to expected material behaviour. In rock cutting problems, a sufficiently large specimen must be taken in order to avoid artificial boundary effects. In such specimens, a large part of the rock material is not damaged and can be treated as a continuous material. A continuous material deformation is usually modelled efficiently using the FEM. Therefore an optimum model of rock cutting can be obtained combining the DEM with the FEM in such a way that discrete elements are used only in a portion of the analysed domain where material fracture occurs, while outside the DEM subdomain finite elements are used (Oñate and Rojek, 2004; Labra et al, 2008a). The numerical method proposed in this paper is based on the formulation presented by Rojek and Oñate (2007). Preliminary results for a 2D rock

cutting problems obtained with the DEM/FEM coupled method have been presented by Labra et al (2008a). In the present paper, this algorithm is applied to 3D simulation of the rock cutting problem. This work is original with respect to other research. As far as we know, DEM/FEM coupling has not been used for rock cutting simulations by other authors. Other studies of rock cutting, cf. Stavropoulou (2006); Rojek et al (2011); Su and Akcin (2011); Huang et al (2012); van Wyk et al (2014), have employed pure DEM models.

Numerical simulations presented here have been performed for the linear cutting machine (LCM) test. The LCM test is one of the most representative testing procedures for prediction of TBM disc cutters (Nilsen and Ozdemir, 1993; Rostami and Ozdemir, 1993) and it is used extensively in the design of rock cutting tools. Both unrelieved and relieved cutting modes have been studied. The simulation results have been compared with available experimental data and the predictions of the empirical model developed by Rostami (1997). The use of numerical models and simulation has allowed us to study some aspects of rock cutting such as the stress field in rock and disc or pressure in the contact zone which are difficult to study using experimental techniques. Direct measurements of the load distribution in the contact between disc cutter and rock performed by Rostami (2013) have proved that the problem of the load and stress concentration in the contact zone is far from being fully understood and requires further studies. The numerical model presented in this work can be a useful tool to verify theoretical models for rock cutting with disc cutters. Rock fragmentation induced by TBM disc cutters has also been studied by other authors using DEM models (Gong et al, 2006; Moon et al, 2006), but in those works the authors employed 2D models so the simulations consisted in analysis of indentation under plane stress conditions. The present work is the first one employing a full 3D model reproducing real cutting conditions for a TBM disc cutter.

2 Linear cutting test

Performance of a TBM depends on on the rock breakage mechanism induced by disc cutters (Yagiz et al, 2010). Rock failure mechanism during cutting with a disc cutter is illustrated in Figure 2. A crushed zone develops beneath the cutter as it is forced into the rock. As stresses continue to build up in the crushed zone, radial cracks begin to form and propagate into the rock. When one or more of these cracks meet those developed from adjacent cut, chips are released (Balci and Bilgin, 2007). The most important factors influencing cutting efficiency are the disc geometry (diameter and tip width), spacing between disc cutters, and penetration.

Tool–rock interaction is characterized by the reaction (cutting) forces. The resultant cutting forces over a single disc cutter are decomposed into three components: the normal force, rolling force and side force, as depicted in Figure 3. Cutting forces have great influence on the efficiency of the cutting process. They are used to estimate global forces (thrust force and torque) over the TBM (Ramezanzadeh et al, 2004; Farrokhi et al, 2012). Cutting forces can be estimated experimentally or theoretically.

The linear cutting machine (LCM) test (Figure 4) is one of the most common experimental procedures to predict performance of a single cutting tool (EMI, 2016;

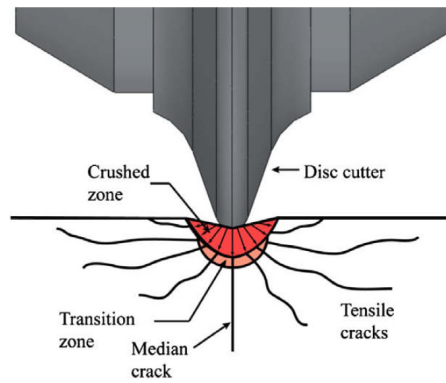


Fig. 2 Rock failure mechanism during cutting with a disc cutter (Cho et al, 2010).

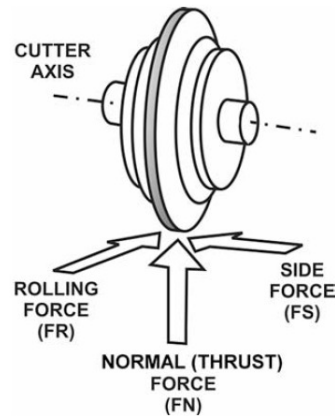


Fig. 3 Forces acting on a disc cutter.

Nilsen and Ozdemir, 1993; Rostami and Ozdemir, 1993). It is a full-scale test which was originally developed by the Colorado School of Mines (CSM), The LCM test provides a direct measure of cutting forces and rock cuttability under pre-defined process parameters such as the cutter spacing, cutter penetration, cutter thrust and cutting speed.

The LCM test is a suitable test to validate a numerical model of rock cutting. With the simulations of the LCM test for a single disc cutter is possible to perform an analysis of the effect of different parameters such as velocity, penetration rate, or tool geometry, on the resultant forces, as well as their influence on the rock fracture.

3 Theoretical predictions of rock cutting performance

3.1 Cutting forces prediction models

Cutting forces estimation is based on the correlation of different parameters, such as the disc cutter geometry, spacing, penetration rate, disc rolling velocity and rock

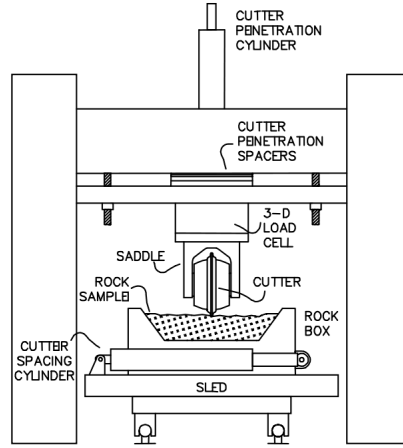


Fig. 4 Linear cutting machine (Colorado School of Mines).

material properties. Early prediction models for single V-shape disc cutters were proposed by Roxborough and Phillips (1975), Sanio (1985) and Sato et al (1991). Colorado School of Mines developed a model for the CCS-shape cutters (Rostami and Ozdemir, 1993; Rostami, 1997). This model will be used here for the comparison with the simulation results for the LCM test.

The first version of the Colorado School of Mines model was developed by Ozdemir (1977), and later was updated by Rostami and Ozdemir (1993); Rostami (1997). The CSM model estimates the cutting forces considering a given penetration, rock mass properties, cutter geometry and cutting conditions. The model is based on a large data base of full scale LCM tests, and does not consider rock mass conditions such as fractures or joints.

The model proposes a pressure distribution P in the crushed zone as

$$P(\theta) = P_o \left(\frac{\theta}{\phi} \right)^\psi \quad (1)$$

where ψ is a constant for the pressure distribution function (typically varying between 0.2 for V-shape and very sharp cutters to -0.2 for wider tip cutters), ϕ – the angle of contact between the rock and the cutter, defined as

$$\phi = \cos^{-1} \left(\frac{R-p}{R} \right) \quad (2)$$

and P_o is the base pressure in the crushed zone, established from regression analysis of several tests, and estimated from rock strength and cutting geometry:

$$P_o = C \sqrt[3]{\frac{\sigma_c^2 \sigma_t s}{\phi \sqrt{RT}}} \quad (3)$$

where C is a dimensionless constant (usually $C = 2.12$), and s the spacing between cutters.

The total resulting cutting force F_T can be obtained by integrating the pressure over the contact area (Figure 5), as

$$F_T = \int_0^\phi T R P(\theta) d\theta = \frac{T R P_o \phi}{1 + \psi} \quad (4)$$

where T is the cutter tip width and R the cutter radius.

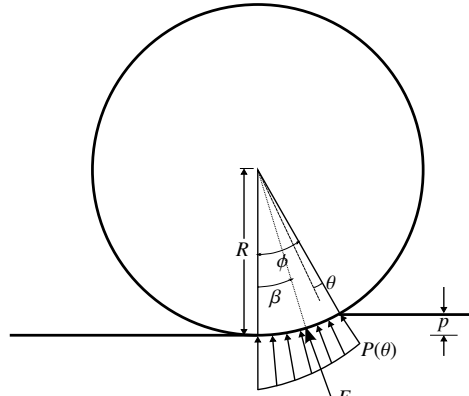


Fig. 5 Scheme of forces acting on a disc cutter and incidence angles.

To recover the normal and rolling forces, the cutting coefficient CC (also called rolling coefficient) is used, which is the ratio of both forces defined by the angle β as

$$CC = \frac{F_r}{F_n} = \tan \beta \quad (5)$$

Assuming a uniform distribution of the pressure in the contact area, the model proposes a geometrical definition of β as the middle point of the contact area, i.e.

$$\beta = \frac{\phi}{2} \quad (6)$$

so finally, the normal and rolling forces are estimated projecting the total force in each direction as

$$F_n = F_T \cos \beta = \frac{T R \phi P_o}{1 + \psi} \cos \frac{\phi}{2} \quad (7)$$

$$F_r = F_T \sin \beta = \frac{T R \phi P_o}{1 + \psi} \sin \frac{\phi}{2} \quad (8)$$

This model have been used for the estimation of the TBM cutterhead performance in many tunneling projects with a high degree of success (Rostami et al, 1996; Rostami, 2008; Exadaktylos et al, 2008).

3.2 Specific energy

Rock cutting efficiency is commonly assessed using the specific energy as its criterion. The specific energy SE is defined as the amount of energy required to excavate a unit volume of rock. SE for a single disc cutter is defined as

$$SE = \frac{F_r L}{V} \quad (9)$$

where F_r is the rolling force, L the cutting distance, and V the cutting volume. Assuming optimum cutting performance the cutting volume V can be expressed in terms of the penetration depth p and spacing between disc cutters s as $V = p L s$, which allows us to rewrite Eq. (9) as follows

$$SE = \frac{F_r L}{p L s} = \frac{F_r}{p s} \quad (10)$$

The ratio of the spacing and penetration (s/p) is a suitable variable to investigate cutting efficiency with TBMs (Sato et al, 1991; Rostami, 1997, 2008).

The specific energy can be used to predict TBM performance. The procedure is described by (Bilgin et al, 1999, 2014). Given the specific energy SE (in kWh/m³) the net production rate NPR (in m³/h) of the excavating machine can be calculated from the following equation:

$$NPR = \frac{kP}{SE} \quad (11)$$

where k is the energy transfer ratio from the cutting head to the tunnel face, it is usually taken as equal 0.8 for TBM, cf. Bilgin et al (2014), and P (in kW) is the power used to excavate rock expressed in terms of the TBM torque T (in kNm) and the rotational velocity of the cutterhead N (in revolutions/sec) as follows:

$$P = 2\pi NT \quad (12)$$

4 Formulation of the model

4.1 Basic assumptions

A numerical model allowing us to simulate the LCM test has been developed. A system consisting of a tool and rock sample is considered in the model. The tool is considered as a rigid body. The rock is modelled using a hybrid discrete-finite element method approach in which a part of the rock near the tool is modelled using the discrete element method (DEM) and the other part is considered using the finite element method (FEM). The DEM and FEM subdomains are coupled using special kinematic constraints. The tool-rock interaction is modelled assuming the Coulomb friction model. Rock fracture during cutting is assumed to be localized in the DEM subdomain and the FEM subdomain is assumed to be continuous and linearly elastic.

4.2 Discrete element method formulation

The discrete element model assumes that material can be represented by an assembly of distinct particles or bodies interacting among themselves. Generally, discrete elements can have arbitrary shape. In this work the formulation employing spherical rigid particles is used. Basic formulation of the particle-based discrete element method was first proposed by Cundall and Strack (1979). A similar formulation of the DEM has been implemented in the explicit dynamic finite element method program by Rojek and Oñate (2004); Oñate and Rojek (2004), starting the development of the DEM/FEM code DEMpack (CIMNE, 2010).

The translational and rotational motion of the rigid spherical elements (particles) is governed by the standard equations of rigid body dynamics. For the i -th element we have

$$m_i \ddot{\mathbf{u}}_i = \mathbf{F}_i \quad (13)$$

$$J_i \dot{\boldsymbol{\omega}}_i = \mathbf{T}_i \quad (14)$$

where \mathbf{u}_i is the position vector of the element centroid in a fixed (inertial) coordinate frame, $\boldsymbol{\omega}_i$ is the angular velocity, m_i is the element mass, J_i is the element moment of inertia, \mathbf{F}_i is the vector of resultant forces, and \mathbf{T}_i is the vector of resultant moments about the element central axes. Equations of motion (13)-(14) are integrated in time using the central difference scheme.

Vectors \mathbf{F}_i and \mathbf{T}_i are sums of all forces and moments applied to the i -th element due to external load, $\mathbf{F}_i^{\text{ext}}$ and $\mathbf{T}_i^{\text{ext}}$, contact interactions with neighbouring spheres and other obstacles $\mathbf{F}_i^{\text{cont}}$ and $\mathbf{T}_i^{\text{cont}}$, as well as forces and moments resulting from external damping in the system, $\mathbf{F}_i^{\text{damp}}$ and $\mathbf{T}_i^{\text{damp}}$, respectively, which can be written as

$$\mathbf{F}_i = \mathbf{F}_i^{\text{ext}} + \sum_{j=1}^{n_i^c} \mathbf{F}_{ij}^{\text{cont}} + \mathbf{F}_i^{\text{damp}} \quad (15)$$

$$\mathbf{T}_i = \mathbf{T}_i^{\text{ext}} + \sum_{j=1}^{n_i^c} \mathbf{r}_{ij}^c \times \mathbf{F}_{ij}^{\text{cont}} + \mathbf{T}_i^{\text{damp}} \quad (16)$$

where \mathbf{r}_{ij}^c is the vector connecting the centre of mass of the i -th element with the contact point with the j -th element.

Similarly as in Inc. (2006), the damping terms $\mathbf{F}_i^{\text{damp}}$ and $\mathbf{T}_i^{\text{damp}}$ in Eqs. (15) and (16) in the present work are of non-viscous type and are given by:

$$\mathbf{F}_i^{\text{damp}} = -\alpha^t \|\mathbf{F}_i^{\text{ext}} + \sum_{j=1}^{n_i^c} \mathbf{F}_{ij}^{\text{cont}}\| \frac{\dot{\mathbf{u}}_i}{\|\dot{\mathbf{u}}_i\|} \quad (17)$$

$$\mathbf{T}_i^{\text{damp}} = -\alpha^r \|\mathbf{T}_i^{\text{ext}} + \sum_{j=1}^{n_i^c} \mathbf{r}_{ij}^c \times \mathbf{F}_{ij}^{\text{cont}}\| \frac{\boldsymbol{\omega}_i}{\|\boldsymbol{\omega}_i\|} \quad (18)$$

where α^t and α^r , are respective damping factors for translational and rotational motion. The damping provides a mechanism to dissipate contact oscillations and represent properly dissipation of the real material. Effect of damping has been investigated by Rojek et al (2013).

4.3 Constitutive contact models

The overall behaviour of the system is determined by the contact laws assumed for the particle interaction. Models of contact in the discrete element method can include force and moment interaction between particles. In the present work, however, contact moments are not considered.

Formulation of the constitutive model employs the decomposition of the contact force between two elements \mathbf{F}^{cont} (In the next part of this section indices denoting the elements will be omitted) into normal and tangential components, \mathbf{F}_n and \mathbf{F}_t , respectively:

$$\mathbf{F}^{\text{cont}} = \mathbf{F}_n + \mathbf{F}_t = F_n \mathbf{n} + \mathbf{F}_t \quad (19)$$

where \mathbf{n} is the unit vector along the line connecting the centroids of two contacting particles. Modelling of rock or other cohesive materials requires contact models with cohesion allowing tensile interaction force between particles (Potyondy and Cundall, 2004; Choi, 1992). In the present formulation, rock materials are modelled using the elastic-perfectly brittle model of contact interaction, in which initial bonding between neighbouring particles is assumed. These bonds can be broken under excessive load which allows us to simulate initiation and propagation of material fracture. Contact laws for the normal and tangential direction in the elastic-perfectly brittle model have been investigated by Labra (2012).

When two particles are bonded the contact forces in both normal and tangential directions are calculated from the linear constitutive relationships:

$$F_n = K_n u_n \quad (20)$$

$$\|\mathbf{F}_t\| = K_t \|\mathbf{u}_t\| \quad (21)$$

where K_n is the interface stiffness in the normal direction, k_s is the interface stiffness in the tangential direction, u_n is the overlap ($u_n \leq 0$) or gap ($u_n > 0$) at the contact point, \mathbf{u}_t is the relative displacement at the contact point in tangential direction. Consistently with the sign convention for u_n and Eq. (20), the normal force F_n is negative in compression and positive in tension. The particle gap/penetration u_n is given in terms of the distance between the particle centroids l (also called branch length) and their radii r_i and r_j

$$u_n = l - (r_i + r_j) \quad (22)$$

and the relative tangential displacement \mathbf{u}_t is updated incrementally

$$\mathbf{u}_t = \mathbf{u}_t^{\text{old}} + \Delta \mathbf{u}_t \quad (23)$$

where $\mathbf{u}_t^{\text{old}}$ is the vector of the relative tangential displacement from the previous time step rotated to the present contact plane and $\Delta \mathbf{u}_t$ is the incremental relative tangential displacement

$$\Delta \mathbf{u}_t = \mathbf{v}_t \Delta t \quad (24)$$

with \mathbf{v}_t being the relative tangential velocity at the contact point.

Cohesive bonds are broken instantaneously when the interface strength is exceeded in the normal or tangential direction

$$F_n \geq R_n \quad (25)$$

$$\|\mathbf{F}_t\| \geq R_t \quad (26)$$

where R_n in the interface strength in the normal direction, and R_t the interface strength in the tangential direction. After decohesion the contact is treated assuming a standard contact model with Coulomb friction. The normal contact force can be compressive only ($F_n \leq 0$) and the tangential contact force is limited by $\mu|F_n|$

$$\|\mathbf{F}_t\| \leq \mu|F_n| \quad (27)$$

where μ is the Coulomb friction coefficient.

Two approaches to evaluation of contact model parameters, K_t , K_n , R_t and R_n , can be distinguished. In the first approach, the stiffness and strength parameters of the contact model are assumed to depend on the size of contacting particles and are evaluated locally as certain functions of contacting pair radii (Potyondy and Cundall, 2004). In the second approach, uniform microscopic properties are assumed in the whole discrete element assembly (Kruty and Rothenburg, 2004). The latter approach is adopted in the present work. Numerical studies performed by Rojek et al (2012) have shown that uniform global parameters lead to a more brittle behaviour of discrete element models than local size dependent parameters.

4.4 Discrete/finite element method coupling

It is assumed that the DEM and FEM can be applied in different subdomains of the same body. The DEM and FEM subdomains can overlap each other. The common part of the subdomains is the part where both discretization types are used with gradually varying contribution of each modelling method. This allows us to avoid or minimize unrealistic wave reflections at the interface between the DEM and FEM subdomains. The idea of such coupling follows that used by Xiao and Belytschko (2004) for bridging molecular dynamics with a continuous model.

The FEM subdomain is modelled using the so-called explicit dynamic formulation of the FEM is used. The explicit FEM is based on the solution of discretized equations of motion written in the current configuration in the following form:

$$\mathbf{M}_F \ddot{\mathbf{u}}_F = \mathbf{F}_F^{\text{ext}} - \mathbf{F}_F^{\text{int}} \quad (28)$$

where \mathbf{M}_F is the mass matrix, $\ddot{\mathbf{u}}_F$ is the vector of nodal displacements, $\mathbf{F}_F^{\text{ext}}$ and $\mathbf{F}_F^{\text{int}}$ are the vectors of external loads and internal forces, respectively. The form of the FEM equations (28) is similar to the DEM equations (13), which allows us to use the same solution scheme based on the central difference time integration scheme.

The coupling of DEM and FEM subdomains is provided by additional kinematic constraints. The discrete elements in the transitory zone are constrained by the displacement field of overlapping interface finite elements. Making use of the split of the global vector of displacements of discrete elements, \mathbf{u}_D , into the unconstrained part, \mathbf{u}_{DU} , and the constrained one, \mathbf{u}_{DC} , $\mathbf{u}_D = \{\mathbf{r}_{DU}, \mathbf{r}_{DC}\}^T$, additional kinematic relationships can be written jointly in the matrix notation as follows:

$$\chi = \mathbf{u}_{DC} - \mathbf{N}\mathbf{u}_F = \mathbf{0} \quad (29)$$

where \mathbf{N} is the matrix containing adequate shape functions. Additional kinematic constraints (29) can be imposed by the Lagrange multiplier or penalty method. The set of equations of motion for the coupled DEM/FEM system with the penalty coupling is as follows

$$\begin{bmatrix} \bar{\mathbf{M}}_F & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \bar{\mathbf{M}}_{DU} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \bar{\mathbf{M}}_{DC} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & \bar{\mathbf{J}}_D \end{bmatrix} \begin{Bmatrix} \ddot{\mathbf{u}}_F \\ \ddot{\mathbf{u}}_{DU} \\ \ddot{\mathbf{u}}_{DC} \\ \dot{\omega}_D \end{Bmatrix} = \begin{Bmatrix} \bar{\mathbf{F}}_F^{\text{ext}} - \bar{\mathbf{F}}_F^{\text{int}} + \mathbf{N}^T \mathbf{k} \chi \\ \bar{\mathbf{F}}_{DU} \\ \bar{\mathbf{F}}_{DC} - \mathbf{k} \chi \\ \bar{\mathbf{T}}_D \end{Bmatrix} \quad (30)$$

where \mathbf{k} is the diagonal matrix containing on its diagonal the values of the discrete penalty function, and global matrices $\bar{\mathbf{M}}_F$, $\bar{\mathbf{M}}_{DU}$, $\bar{\mathbf{M}}_{DC}$ and $\bar{\mathbf{J}}_D$, and global vectors $\bar{\mathbf{F}}_F^{\text{ext}}$, $\bar{\mathbf{F}}_F^{\text{int}}$, $\bar{\mathbf{F}}_{DU}$, $\bar{\mathbf{F}}_{DC}$ and $\bar{\mathbf{T}}_D$ are obtained by aggregation of adequate elemental matrices and vectors taking into account appropriate contributions from the discrete and finite element parts. Equation (30) is integrated in time using the standard central difference scheme. A detailed description of the coupled DEM/FEM formulation is given by Rojek and Oñate (2007).

4.5 Determination of DEM parameters

The discrete element model can be regarded as a micromechanical material model, with the contact model parameters being micromechanical parameters. Assuming adequate micromechanical parameters we obtain required macroscopic rock properties. The most important macroscopic rock properties include the Young's modulus E , Poisson's coefficient ν , compressive strength σ_c and tensile strength σ_t , which will be used for the model calibration in this work. The contact stiffness moduli, K_n and K_t , and bond strengths, R_n and R_t , as well as the Coulomb friction coefficient μ will be taken as the most significant micromechanical parameters influencing the macroscopic elastic and strength properties.

The parameter identification in the DEM is a typical inverse problem and it is often solved by a trial-and-error method (Wang and Tonon, 2010). Simulations with assumed model parameters are repeated until specific macroscopic properties are reproduced with sufficient accuracy. In the present work, the micromechanical parameters have been determined using the methodology based on the dimensional analysis proposed by Huang (1999) and used later in other works, cf. (Fakhimi and Villegas, 2007; Yang et al, 2006; Rojek et al, 2011; Labra, 2012). Results of numerical simulations of the standard laboratory tests for rocks, the unconfined compressive strength (UCS) test and the Brazilian tensile strength (BTS), will allow us to establish dimensionless relationships between the contact parameters and the mechanical material properties.

$$\frac{EL}{K_n} = \Psi_E \left(\frac{K_t}{K_n}, \Phi \right) \quad (31)$$

$$v = \Psi_v \left(\frac{K_t}{K_n}, \Phi \right) \quad (32)$$

$$\frac{\sigma_c A}{R_t} = \Psi_c \left(\frac{R_t}{R_n}, \frac{K_t}{K_n}, \mu, \Phi \right) \quad (33)$$

$$\frac{\sigma_t A}{R_n} = \Psi_t \left(\frac{R_t}{R_n}, \frac{K_t}{K_n}, \mu, \Phi \right) \quad (34)$$

where Ψ represents the dimensionless scale functions, L and A are characteristic lengths and areas of the particle system, and Φ is a function representing the assembly characterization parameters influence, as the porosity of the particle assembly e , or the average particle radius \bar{r} .

Employing a micromechanical analysis, cf. Kruyt and Rothenburg (2002, 2004), equations (31)–(34), can be redefined as follows (Labra, 2012):

$$\frac{E \tilde{r}}{K_n n_c (1 - e)} = \hat{\Psi}_E \left(\frac{K_t}{K_n} \right) \quad (35)$$

$$v = \hat{\Psi}_v \left(\frac{K_t}{K_n} \right) \quad (36)$$

$$\frac{\sigma_c \tilde{r}^2}{R_n n_c (1 - e)} = \hat{\Psi}_c \left(\frac{R_t}{R_n}, \frac{K_t}{K_n}, \mu \right) \quad (37)$$

$$\frac{\sigma_t \tilde{r}^2}{R_n n_c (1 - e)} = \hat{\Psi}_t \left(\frac{R_t}{R_n}, \frac{K_t}{K_n}, \mu \right) \quad (38)$$

where the influence of the assembly is considered in the dimensionless numbers by n_c as average number of contacts per particle (coordination number) and the solid fraction $(1 - e)$. The characteristic length \tilde{r} and area \tilde{r}^2 are defined based on the size distribution of the particle assembly and the average branch length l over all the bonded contacts of the assembly, as

$$\tilde{r} = \frac{4 \bar{r}^3}{l^2} \quad (39)$$

$$\tilde{r}^2 = \frac{2 \bar{r}^3}{l} \quad (40)$$

In order to determine the dimensionless scaling functions, a large number of numerical simulations of the UCS and BTS tests have been performed for different specimens. The dimensionless scaling functions obtained from these simulations which will be later used for the estimation of the DEM parameters are presented in Figures 6 and 7. The influence of the Coulomb friction coefficient in the relationships (37) and (38) has been neglected assuming it affects mainly a post-critical behaviour (Huang

and Detournay, 2008; Potyondy and Cundall, 2004). The relationships plotted in Fig. 7 have been obtained taking $\mu = 0.5$.

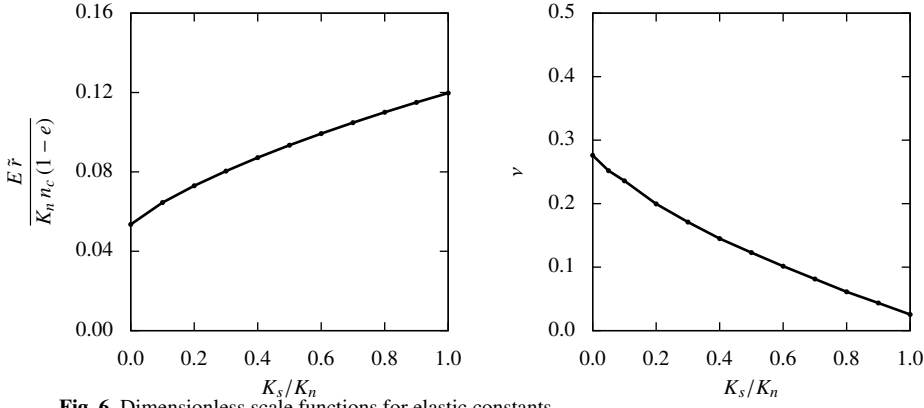


Fig. 6 Dimensionless scale functions for elastic constants.

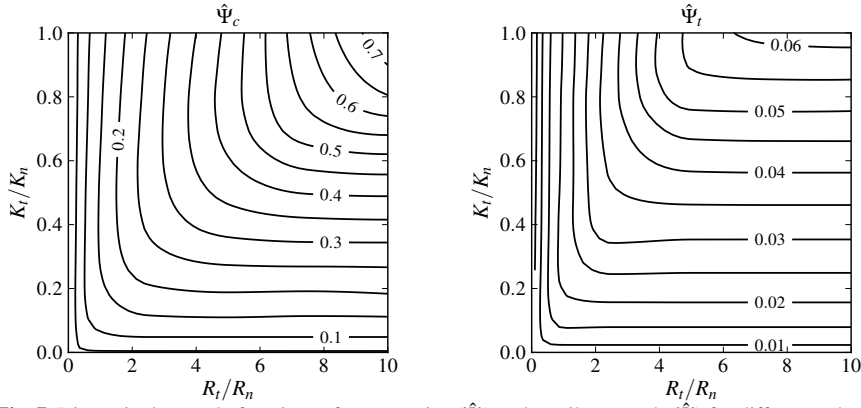


Fig. 7 Dimensionless scale functions of compressive (Ψ_c) and tensile strength (Ψ_t) for different values of K_t/K_n and R_t/R_n .

5 Simulation of unrelieved rock cutting

5.1 Numerical model

Simulation of the LCM unrelieved test has been performed using the model shown in Figure 8. The disc cutter of diameter 19'' has been considered. The geometry of the cutting tool has been taken according to the standard constant cross section (CCS) disc profiles used in Herrenknecht AG TBMs. The cutter disc has been discretized

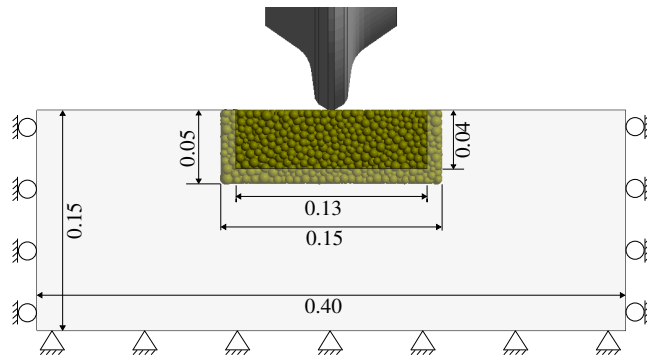


Fig. 8 Unrelieved rock specimen discretized with the coupled DEM/FEM scheme.

with 8880 triangular elements, considering a refinement in the cutter tip in order to reproduce its curvature. It has been treated as a rigid body with all the discretizing nodes slaved to its centre. The disc has a prescribed translational motion and can rotate about its axis of symmetry under the action of the rolling force. A real value of the disc moment of inertia has been used. In this way, a real kinematics and dynamics of the disc cutters during cutting have been reproduced.

The full-scale LCM tests are performed using $1.0 \text{ m} \times 0.7 \text{ m} \times 0.7 \text{ m}$ block rock samples. In order to obtain results at a reasonable computational cost a smaller sample with dimensions $0.4 \text{ m} \times 0.15 \text{ m} \times 0.4 \text{ m}$ has been taken in the numerical model. Numerical tests have shown that it is sufficiently large to avoid boundary effects. The unrelieved rock sample with the adopted boundary conditions is shown in Figure 8. The displacement of the bottom surface of the sample has been completely restricted, while lateral surfaces have had the out-of-surface displacements restricted.

The DEM discretization has been employed in the zone of interaction with the disc cutter in the subdomain of size $0.15 \text{ m} \times 0.05 \text{ m} \times 0.4 \text{ m}$, as shown in Figure 8. The rest of the sample has been discretized with finite elements taking the 0.01 m thick overlap zone. 4752 tetrahedral elements have been used in the FE discretization and the DEM subdomain have been discretized with 35604 spherical particles, with the radius range $1.4\text{--}3.9 \text{ mm}$. The characteristic parameters of the particle assembly are shown in Table 1.

Table 1 Characterization of the particle assembly for the LCM test.

Parameter	Value
Number of particles, N_p	35604
Characteristic radius, \tilde{r} (mm)	2.7971
Coordination number, n_c	11.449
Porosity, e (%)	24.912

Mechanical properties corresponding to granitic gneiss taken from laboratory tests (Labra et al, 2008b) are given in Table 2. The elastic constants are used in the

Table 2 Mechanical rock properties.

Parameter	Value
Uniaxial compressive strength, σ_c (MPa)	147.3
Brazilian tensile strength, σ_t (MPa)	10.2
Young modulus, E (GPa)	40.0
Poisson's ratio, ν	0.23
Density, ρ (kg/m ³)	2650

FEM subdomain. The DEM model parameters, given in Table 3, have been estimated employing the methodology presented in Section 4.5, using the properties from Table 2 and considering the particles assembly characterization. The density of the particles

Table 3 DEM model parameters for the LCM test.

Parameter	Value
Normal stiffness, k_n (MN/m)	160.79
Tangential stiffness, k_t (MN/m)	16.325
Normal bond strength, R_n (kN)	0.8482
Tangential bond strength, R_t (kN)	4.1759
Density, ρ (kg/m ³)	3085

is calculated considering the solid fraction of the assembly, in order to preserve the equivalent mass.

The main cutting process parameters, the velocity and penetration rates, taken from a real TBM drive (Labra et al, 2008b), are given in Table 4. The TBM advance per cutterhead revolution has been taken as the penetration rate and the linear velocity of one of outer disc cutters at considered working conditions has been taken as the cutting velocity for our simulations of the LCM test. The amount of penetration per

Table 4 Cutting process parameters.

Parameter	Value
Penetration rate, p (mm/rev)	3.9
Cutting velocity, v (m/s)	2.37

revolution has been taken as the penetration depth in the LCM model. The penetration depth in all the simulations has been defined as the indentation depth of the cutter tip below the free undamaged surface of the rock sample. It was kept constant under the prescribed cutting tool trajectory. In the LCM test, one of the most important parameters is the spacing between the disc cutters (Rostami and Ozdemir, 1993). This parameter cannot be taken into account in the unrelieved cutting. It will be included in simulation of the relieved cutting later on.

5.2 Numerical results

Simulation of the unrelieved cutting is shown in Figure 9. Material failure induced by the moving disc cutter is illustrated with the damage parameter defined as the ratio of the number of broken bonds to the initial number of cohesive bonds for each particle. The value of the damage parameter ranges from 0 to 1, it is equal 0 for the undamaged material and 1 for the completely damaged one. Force-displacement curves and

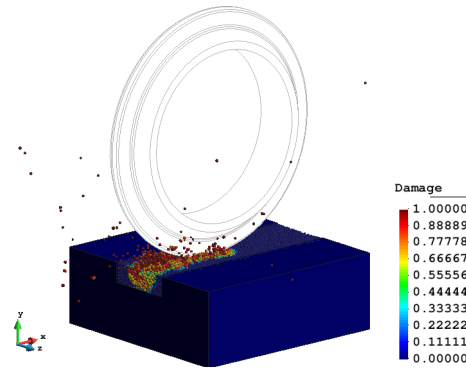


Fig. 9 Simulation of the unrelieved LCM test – material damage.

corresponding average forces are plotted in Figure 10. The forces have been taken in the range from 0.1 to 0.25 m discarding the results affected by the boundary of the specimen. The average forces obtained in the simulation have been given in Table 5 along with available experimental data for comparison. The experimental normal

Table 5 Summary of the results for the LCM test with unrelieved specimen.

	Simulation	Experiment
F_n (kN)	191.1	231.8
F_r (kN)	19.6	–
F_s (kN)	0.9	–
CC	0.102	–

force has been estimated from in-situ measurements of a real TBM thrust (Labra et al, 2008b). The in situ value of the normal force for one disc has been calculated by dividing the total thrust force by the total number of disc cutters. In principle, the thrust force obtained from a TBM represents the relieved cutting mode because of interaction between cutting grooves in a TBM excavation. However, in this case the cutter spacing was quite large so the interaction between disc cutters was small and the conditions were close to the unrelieved cutting mode.

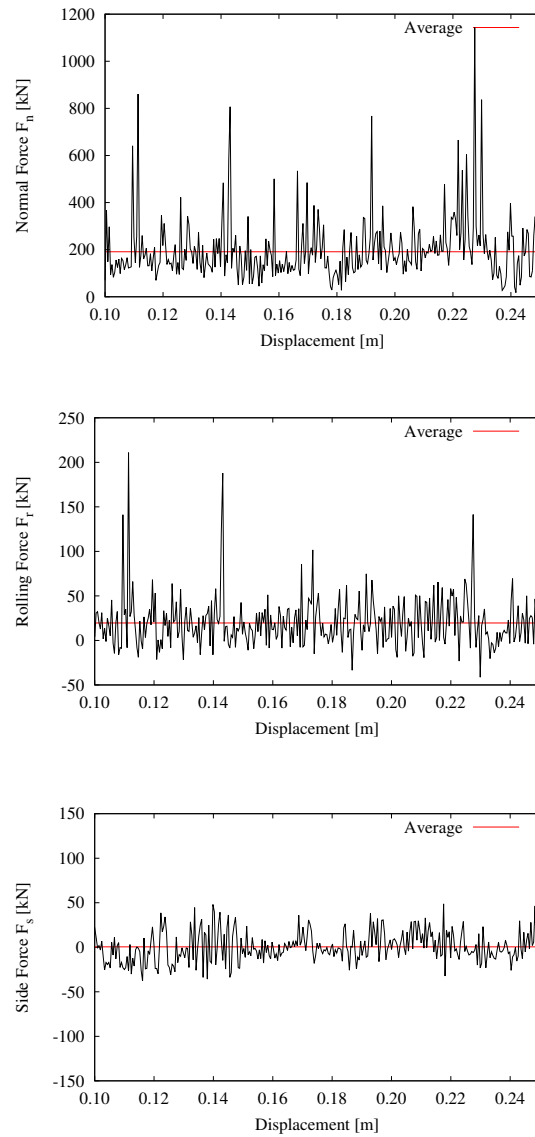


Fig. 10 Cutting forces in LCM test in the unrelieved mode.

The average normal force obtained in simulation, 191.08 kN, agrees quite well with the estimated experimental value, 231.8 kN. No comparison with the force predicted by the CSM model has been done because this model considers a spacing between disc cutters, which requires the use of the relieved rock sample.

Using the values of the average normal and rolling forces obtained in simulation the cutting coefficient CC is evaluated. The value of the cutting coefficient given in

Table 5, 0.102, is in the range of the CC values expected for a hard rock (Tarkoy, 1983). Obviously, correctness of prediction of the normal forces and cutting coefficients, verifies correctness of the predicted values of the rolling forces.

Numerical model allows us to analyze stress distribution in the rock under the forces exerted by the cutting tool. A stress concentration in the rock under the disc can be clearly seen in Fig. 11 showing the distribution of the minimum principal stress (σ_3) in the longitudinal cross-section of the specimen. The stresses in the discrete element model have been evaluated by averaging procedure over representative volume elements taken around each particle (Rojek and Oñate, 2007).

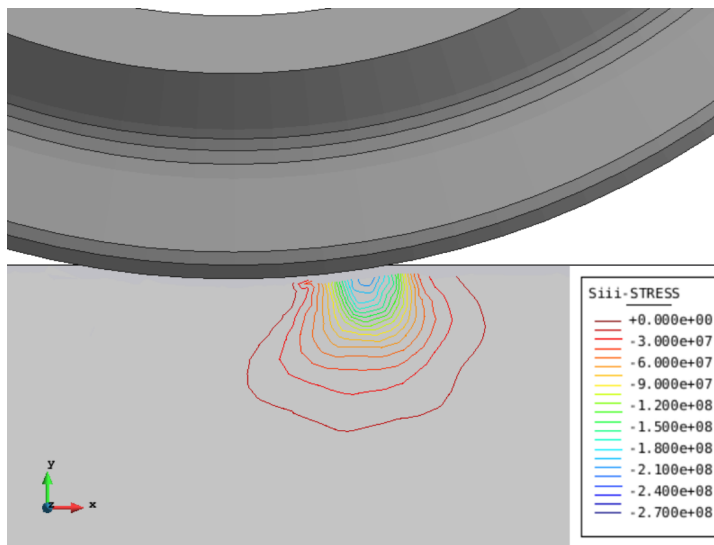


Fig. 11 Minimum principal stress distribution in the crushed zone for the LCM test with unrelieved material.

The information on stress distribution and evolution during cutting cannot be obtained directly in laboratory tests. Stress analysis is important for investigation of the mechanism of rock cutting and verification of the assumptions made in theoretical models of rock cutting.

The stress concentration under the cutting tool is strictly related to the distribution of the contact pressure. The CSM model developed by Rostami and Ozdemir (1993); Rostami (1997) assumes nearly uniform pressure distribution in the contact zone (see Fig. 5). Stress concentration in a small area close to the attack point observed in Fig. 11 suggests that the contact pressure cannot be uniform in the contact area. This is confirmed in Figs. 12 showing average contact force distribution over the disc cutter. The corresponding pressure distribution is depicted in Figure 13. The non-uniform distribution obtained in simulations is characterized by a relatively small value (in comparison with a peak value) of the pressure at the attack point, where the disc cutter enters in the contact with the rock and a very small pressure at the rear

part of the theoretical contact area. This is contradictory to the assumptions made in the CSM model by Rostami and Ozdemir (1993); Rostami (1997), but it agrees quite well with the results of experimental investigations of the pressure distribution over the cutter discs published by Rostami (2013).

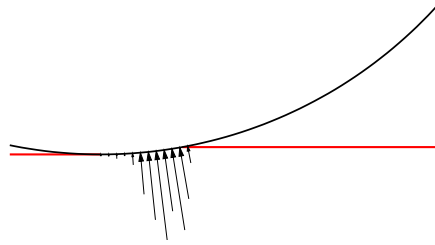


Fig. 12 Average distribution of normalized forces over disc cutters in LCM test with unrelieved material.

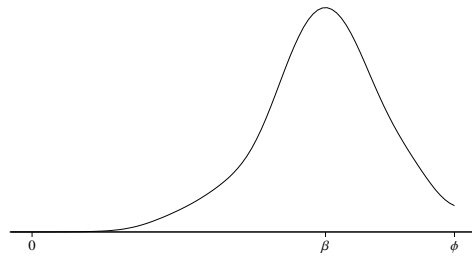


Fig. 13 Estimated pressure distribution over disc cutter.

The force distribution plotted in Fig. 13 allows us to estimate the angle β determined by the direction of the resultant interaction force. The β angle and cutting coefficient (CC) obtained in the simulation are compared with the respective values predicted by the CSM model in Table 6. The theoretical values of the angle β according the CSM model have been calculated as proposed by Gertsch et al (2007); Rostami (2008) It can be noted that the values of the angle β and cutting coefficient (CC) obtained in the simulation are very close to those estimated by the CSM model.

Table 6 Comparison of angle β and cutting coefficient (CC) in the unrelieved LCM test.

	CSM model	Simulation
β (deg)	5.158	5.859
CC	0.09027	0.10262

5.3 Sensitivity analysis of unrelieved cutting

Influence of various parameters on the the performance of the rock cutting process has been analyzed. Sensitivity of the results to changes of process and design parameters is very important for an optimization of the process. Two different categories of the parameters involved in the rock cutting process can be distinguished. The first category is related to the mechanical properties of the rock specimen. Most of the studies reveal that the most relevant mechanical properties of the rock are the compressive and tensile strengths. The elastic constants of the rock are not considered important for the estimation of the cutting forces, and are not analyzed in this section. The second category involves the geometric settings of the cutting process. Here, we can include the profile of the disc cutter, the spacing between discs and penetration. Sensitivity analysis of unrelieved cutting has been performed for the uniaxial compressive strength, cutting velocity and penetration depth. The effect of disc spacing will be analysed later for relieved cutting.

5.3.1 Effect of the uniaxial compressive strength

Compressive strength of the rock material is one of the most significant mechanical parameters for the performance of the cutting process. Figure 14 shows the relationship between the average normal and rolling forces and the uniaxial compressive strength obtained in numerical simulations. The trend line shows a linear increase of

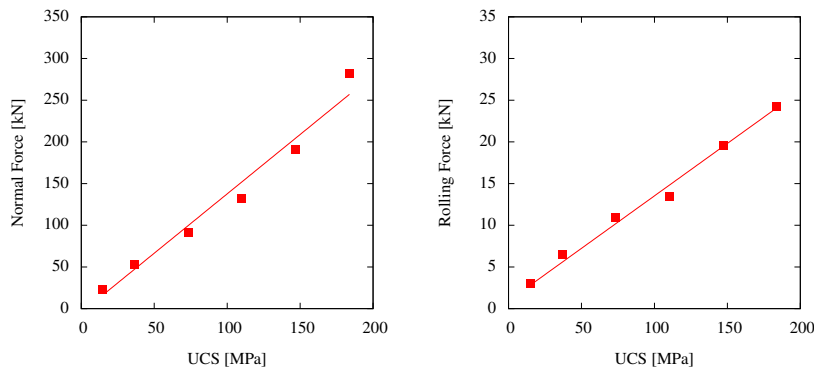


Fig. 14 Normal and rolling forces with different values of UCS in LCM test with unrelieved material.

the forces with the growth of the compressive strength. In the simulation, values of the UCS are estimated using the dimensionless scale functions (Eqs. 37 and 38), assuming a constant ratio between the compressive and tensile strength $\xi = \sigma_c / \sigma_t$. The linear force-strength relationship is also predicted by the CSM model. Introducing the strength ratio $\xi = \sigma_c / \sigma_t$ into Eq. (3) we obtain

$$P_o = C \sigma_c^3 \sqrt{\frac{s}{\xi \phi \sqrt{RT}}} \quad (41)$$

Keeping the ratio ξ and other parameters in Eq. (15) constant we have the linear dependence of the pressure and resulting forces on the compressive strength.

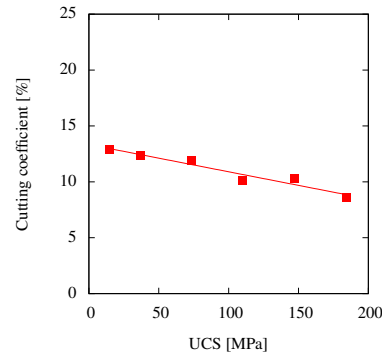


Fig. 15 Cutting coefficient for different values of UCS in LCM test, with unrelieved material.

Figure 15 shows the effect of the compressive strength on the value of the cutting coefficient. In contradiction to the CSM and other theoretical models in the literature, which relate the cutting coefficient with geometric parameters, such as the penetration and disc cutter radius, Figure 15 shows a linear relationship between the compressive strength and the cutting coefficient.

5.3.2 Effect of the penetration depth

The penetration depth, or penetration rate, is one of the most important geometric parameters, together with the disc spacing, that affect the performance of the TBM, as it is directly related with the advance rate of the TBM cutterhead. All the theoretical models employ this parameter in evaluation of cutting forces as well as in estimation of the volume of rock material excavated and amount of energy required for the excavation process.

The results plotted in Figure 16 show the influence of the penetration depth on the normal and rolling forces for the disc cutter of diameter 19" in both materials. When the penetration depth increases, the normal and rolling forces also increase. The influence of the penetration depth can be clearly seen in the value of the rolling force, that is directly related to the energy required in the cutting process.

Figure 17 shows the comparison of the cutting coefficient obtained in the simulations and estimated by the CSM model as functions of the penetration depth. Estimation of the cutting coefficient in the CSM model is based on purely geometric criteria (see Eq. (5)), while the numerical results indicate a certain influence of material properties.

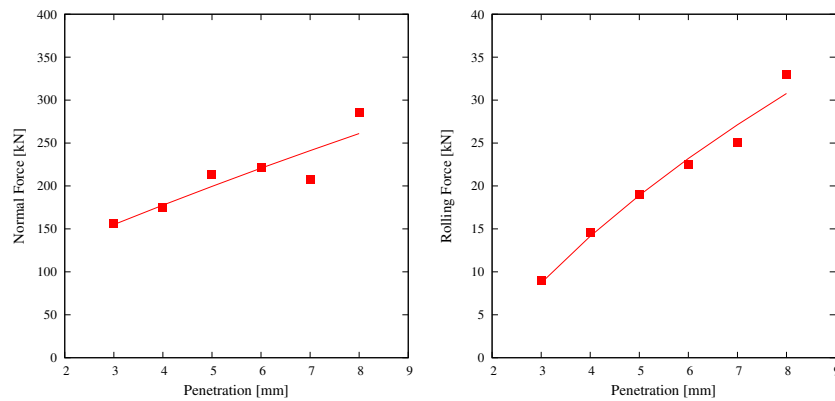


Fig. 16 Normal and rolling forces for different penetration depths in unrelieved LCM test.

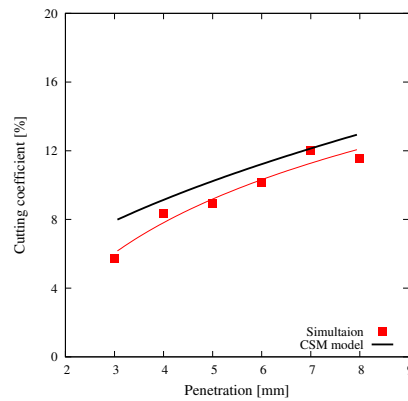


Fig. 17 Comparison of simulated and theoretical cutting coefficient as functions of the penetration depth in the unrelieved LCM test.

6 Simulation of relieved rock cutting

6.1 Numerical model

All the results presented until now have been obtained for unrelieved cutting conditions. Rock cutting with disc cutters mounted in a TBM cutterhead is performed mainly in relieved cutting conditions influenced by the previous passes of disc cutters. Interaction of adjacent cutting paths affects directly the chip formation (Figure 18) and ensures an efficient cutting performance, therefore an optimum spacing between disc cutters is one of the most important parameters in the design of TBMs for hard rock conditions. The optimum spacing between adjacent cutting trajectories for a given penetration of cutters can be determined by minimization of the energy required for the chip formation.

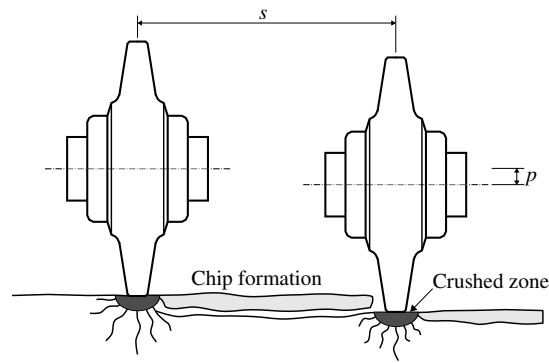


Fig. 18 Influence of cutters spacing in fracture path.

The geometry used to analyze relieved cutting is shown in Figure 19. The size of the specimen is similar to that of the unrelieved specimen shown in Figure 8. A larger DEM subdomain has been used in order to reproduce the spacing up to 0.13 m. The

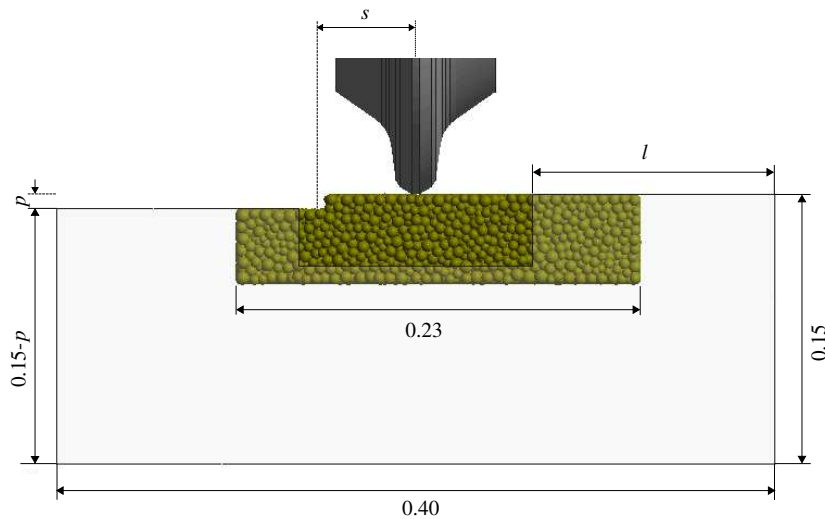


Fig. 19 Geometric description of the DEM and FEM subdomains in relieved rock specimens for the LCM test (m).

parameter l in Figure 19 changes depending on the spacing between the disc cutter and the previous pass in order to maintain a sufficient distance between the disc cutter and the DEM/FEM coupling interface. Two different specimens, for penetration of 4 mm and 8 mm, have been generated. The DEM subdomains have been discretized with 51668 and 50714 particles, respectively. The main parameters characterizing

the particles assemblies are summarized in Table 7. The DEM parameters for the new rock specimens are summarized in Table 8.

Table 7 Characterization of the particles assemblies for relieved rock specimens.

Parameter		Penetration	
		4 mm	8 mm
N_p	Number of particles	51668	50714
\tilde{r}	Characteristic radius (mm)	3.0039	2.9992
n_c	Coordination number	9.0635	9.1028
e	Porosity (%)	22.647	22.821

Table 8 DEM model parameters for LCM test with relieved rock specimens.

Parameter		Penetration	
		4 mm	8 mm
	Normal stiffness, k_n (MN/m)	160.79	160.79
	Tangential stiffness, k_t (MN/m)	16.325	16.325
	Normal bond strength, R_n (kN)	0.4642	0.4640
	Tangential bond strength, R_t (kN)	4.1779	4.1761
	Density, ρ (kg/m ³)	3085	3085

6.2 Numerical results

Figure 20 shows normal and rolling forces for for penetration depth of 4 mm and 8 mm in the relieved LCM test as functions of spacing. Results of the numerical

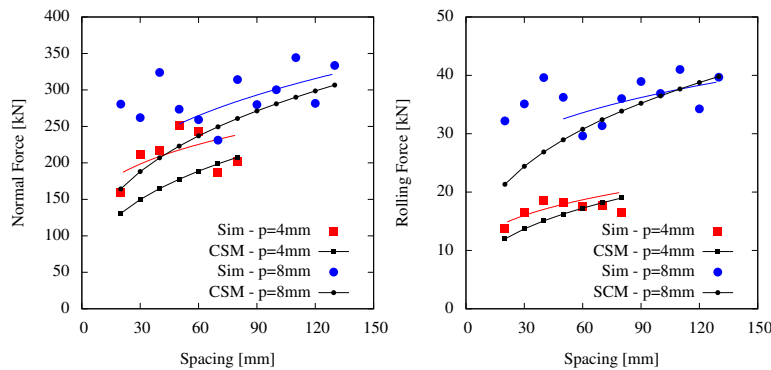


Fig. 20 Normal and rolling forces for different penetration in the relieved LCM test as functions of spacing.

simulations have been compared with the predictions of the CSM model. The normal forces obtained in the simulation are slightly higher than those evaluated using the CSM model for both cases of penetration. So are the numerical rolling forces higher than the theoretical predictions although in this case the difference is smaller.

Numerical and theoretical values of the cutting coefficient are presented in Figure 21 as functions of disc spacing for penetration depth of 4 mm and 8 mm. Numerical results confirm the cutting coefficient is independent of the spacing as it is postulated by the CSM model. The cutting coefficients estimated with the CSM model are higher than those computed in the simulations. A higher difference between the numerical and theoretical values can be seen for the lower penetration. Similarly, the difference between the numerical and theoretical values of the β angle is higher for the lower penetration. The theoretical and numerical values of the cutting coefficient and angle β spacing of 80 mm are given in Table 9.

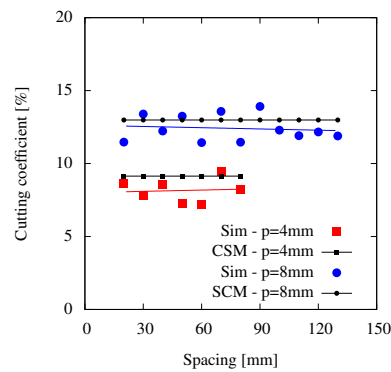


Fig. 21 Cutting coefficient for different penetrations in the relieved LCM test as a function of spacing.

Table 9 Comparison of the angle β and cutting coefficient in the relieved LCM test for spacing of 80 mm.

	CSM model		Simulation	
	4 mm	8 mm	4 mm	8 mm
β (deg)	5.224	7.397	5.240	6.826
CC	0.0914	0.1298	0.0917	0.1197

The present model and the CSM models are different in nature, i.e. one is micromechanical and the other empirical, so the differences in their predictions have different sources. Some differences between the CSM model and the simulations can be explained by simplified assumption for the pressure distribution made in the CSM model. Similarly as in case of the unrelieved rock cutting, the distribution of pressure over the disc cutter obtained in numerical simulation differs from the uniform pressure distribution assumed in the CSM model. Non-uniform distributions of the

interaction forces over the disc cutters for both penetration cases are presented in Figure 22, for the spacing of 80 mm.

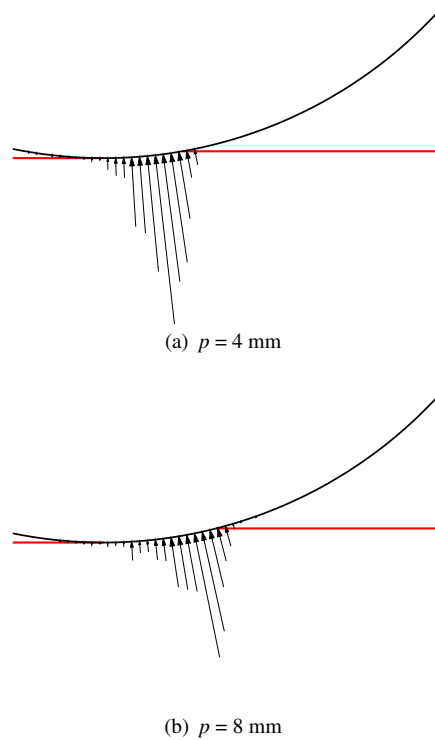


Fig. 22 Average distribution of normalized forces over disc cutters in LCM test with relieved material and spacing of 80 mm.

Having determined the rolling force F_r for the given penetration depth p and disc cutters spacing s , the specific energy SE can be calculated from Eq. (10). The specific energy as a function of the spacing/penetration ratio is plotted in Figure 23. The specific energy computed in simulation of relieved cutting is compared in this figure with the specific energy estimated by the CSM model for different values of penetration and spacing. A good correlation between the CSM model and the simulation results has been obtained.

The specific energy estimated in simulations agrees quite well with field data reported in literature. Bilgin et al (2014) report the field specific energy for the Kadikoy–Kartal Metro where the mean compressive strength of excavated rocks was 50 MPa. The field specific energy varied in the range 7–18 kWh/m³ depending on the penetration rate. These values are slightly below the values given in Figure 23, but this is understandable since the compressive strength in our case was higher (147.3 MPa). The field specific energy reported also by Bilgin et al (2014) for the Beykoz tunnel excavated in rocks with higher compressive strength (100 MPa) varies from 5

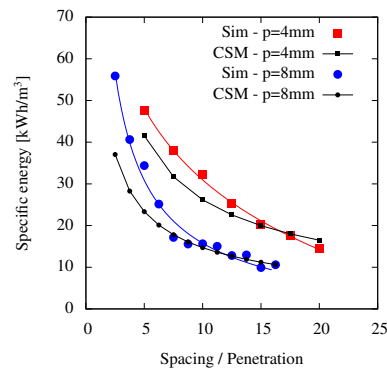


Fig. 23 Specific energy vs. spacing/penetration ratio in the relieved LCM test.

to 27 kWh/m³. The field data show that the numerical simulations gives reasonable predictions of the specific energy. This is an important result of our simulations since confirms a good performance of the model and its potential utility in real applications.

7 Conclusions

Numerical tests have demonstrated a good performance of the coupled discrete/finite element model of rock cutting. A good agreement of numerical results with experimental measurements and theoretical predictions has been found. Main parameters characterizing rock cutting with a TBM disc cutters such as cutting and rolling forces, cutting coefficient and specific energy have been estimated correctly in numerical simulations.

The numerical model is capable to represent properly complexity of rock cutting with TBM disc cutters. The numerical simulation can provide valuable information about the cutting phenomenon such as stress distribution in the rock and contact pressure distribution at the tool-rock interaction area. Numerical results have confirmed a nonuniform contact pressure distribution revealed in experimental investigations and shown that a uniform pressure distribution in theoretical models is a simplified assumption. The numerical model has provided a new insight into the cutting process enabling us to understand better rock cutting mechanism.

Sensitivity analysis of rock cutting performed for different parameters including disc geometry, cutting velocity, disc penetration and spacing has shown that the presented numerical model is a suitable tool for the design and optimization of rock cutting process.

References

- Balci C, Bilgin N (2007) Correlative study of linear small and full-scale rock cutting tests to select mechanized excavation machines. *International Journal of Rock Mechanics and Mining Sciences* 44:468–476
- Bilgin N, Balci C, Acaroglu O, Tuncdemir H, Eskikaya S, Akgul M, Algan M (1999) The Performance Prediction of a TBM in Tuzla – Dragos Sewerage Tunnel. In: *Proceedings of the 1999 World Tunnel Congress*, pp. 817–822
- Bilgin N, Copur H, Balci C (2014) *Mechanical Excavation in Mining and Civil Industries*. CRC Press, Taylor & Francis Group
- Cho JW, Jeon S, Yu SH, Chang SH (2010) Optimum spacing of tbn disc cutters: A numerical simulation using the three-dimensional dynamic fracturing method. *Tunnelling and Underground Space Technology* 25(3):230–244
- Choi S (1992) Application of the distinct element method for rock mechanics problems. *Engineering Computations* 9:225–233
- CIMNE (2010) DEMpack, explicit nonlinear dynamic analysis by the finite and discrete element method. web:www.cimne.upc.edu/dempack
- Cundall P, Strack O (1979) A discrete numerical method for granular assemblies. *Geotechnique* 29:47–65
- EMI (2016) *Excavation Engineering and Earth Mechanics Institute*. Colorado School of Mines. <http://insideminesedu/EMI-home>
- Exadaktylos G, Stavropoulou M, Xiroudakis G, de Broissia M, Schwarz H (2008) A spatial estimation model for continuous rock mass characterization from the specific energy of a TBM. *Rock Mechanics and Rock Engineering* 41:797–834
- Fakhimi A, Villegas T (2007) Application of dimensional analysis in calibration of a discrete element model for rock deformation and fracture. *Rock Mech Rock Engng* 40(2):193–211
- Farrokhi E, Rostami J, Laughton C (2012) Study of various models for estimation of penetration rate of hard rock TBMs. *Tunnelling and Underground Space Technology* 30:110–123
- Gertsch R, Gertsch L, Rostami J (2007) Disc cutting tests in Colorado Red Granite: Implications for TBM performance prediction. *International Journal of Rock Mechanics and Mining Sciences* 44(2):238–246
- Gong QM, Zhao J, Hefny A (2006) Numerical simulation of rock fragmentation process induced by two TBM cutters and cutter spacing optimization. *Tunnelling and Underground Space Technology* 21(3–4):1–8
- Huang H (1999) Discrete element modeling of tool-rock interaction. PhD thesis, University of Minnesota
- Huang H, Detournay E (2008) Intrinsic length scales in tool-rock interaction. *International Journal of Geomechanics* 8(1):39–44
- Huang H, Lecampion B, Detournay E (2012) Discrete element modeling of tool-rock interaction I: rock cutting. *Int J Numer Anal Meth Geomech*
- Huo J, Sun W, Su P, Deng L (2010) Optimal disc cutters plane layout design of the full-face rock tunnel boring machine (TBM) based on a multi-objective genetic algorithm. *Journal of Mechanical Science and Technology* 24(2):521–528

- Inc ICG (2006) PFC^{3D} Particle Flow Code in 3D, Theory and Background Manual. Minneapolis, MN, USA
- Jonak J, Podgórski J (2001) Mathematical model and results of rock cutting modelling. *Journal of Mining Science* 37:615–618
- Kruyt N, Rothenburg L (2004) Kinematic and static assumptions for homogenization in micromechanics of granular materials. *Mechanics of Materials* 36(12):1157–1173
- Kruyt NP, Rothenburg L (2002) Micromechanical bounds for the effective elastic moduli of granular materials. *International Journal of Solids and Structures* 39(2):311–324
- Labra C (2012) Advances in the development of the discrete element method for excavation processes. PhD thesis, Technical University of Catalunya
- Labra C, Rojek J, Oñate E, Zarate F (2008a) Advances in discrete element modelling of underground excavations. *Acta Geotechnica* 3(4):317–322
- Labra C, Rojek J, Oñate E, Köppl F (2008b) Tunconstruct D2.1.3.3: Report of numerical modeling of disc cutter wear. Tech. rep., CIMNE
- Loui J, Karanam UR (2012) Numerical studies on chip formation in drag-pick cutting of rocks. *Geotech Geol Eng* 30:145–161
- Moon T, Nakagawa M, Berger J (2006) DEM analysis for optimizing TBM performance. ARMA Conference Paper 06-1125 (1-5)
- Nilsen B, Ozdemir L (1993) Hard rock tunnel boring prediction and field performance. In: Rapid Excavation and Tunneling Conference RETC
- Oñate E, Rojek J (2004) Combination of discrete element and finite element methods for dynamic analysis of geomechanics problems. *Comput Meth Appl Mech Eng* 193:3087–3128
- Oñate E, Rojek J (2004) Combination of discrete element and finite element methods for dynamic analysis of geomechanics problems. *Computer Methods in Applied Mechanics and Engineering* 193(27-29):3087–3128
- Ozdemir L (1977) Development of theoretical equations for predicting tunnel borability. PhD thesis, Colorado School of Mines, Golden, Colorado, USA
- Potyondy D, Cundall P (2004) A bonded-particle model for rock. *International Journal of Rock Mechanics and Mining Sciences* 41(8):1329–1364, rock Mechanics Results from the Underground Research Laboratory, Canada
- Ramezanzadeh A, Rostami J, Kastner R (2004) Performance prediction models for hard rock tunnel boring machines. In: Proceedings of Sixth Iranian Tunneling Conference, Tehran, Iran
- Roby J, Sandell T, Kocab J, Lindbergh L (2008) The current state of disc cutter design and development directions. In: Roach M, Kritzer M, Ofiara D, Townsed B (eds) North American Tunneling 2008 proceedings, Society for Mining, Metallurgy and Exploration, Inc. (SME), pp 36–45
- Rojek J, Oñate E (2004) Unified DEM/FEM approach to geomechanics problems. In: Proceedings of Computational Mechanics WCCM VI in conjunction with AP-COM04, Beijing, China, Sept. 5–10
- Rojek J, Oñate E (2007) Multiscale analysis using a coupled discrete/finite element model. *Interaction and Multiscale Mechanics* 1:1–31

- Rojek J, Oñate E, Labra C, Kargl H (2011) Discrete element simulation of rock cutting. *International Journal of Rock Mechanics and Mining Sciences* 48(6):996 – 1010
- Rojek J, Labra C, Su O, Oñate E (2012) Comparative study of different discrete element models and evaluation of equivalent micromechanical parameters. *International Journal of Solids and Structures* 49:1497–1517
- Rojek J, Karlis G, Malinowski L, Beer G (2013) Setting up virgin stress conditions in discrete element models. *Computers and Geotechnics* 48:228–248
- Rostami J (1997) Development of a force estimation model for rock fragmentation with disc cutters through theoretical modelling and physical measurement of crushed zone pressure. PhD thesis, Colorado School of Mines
- Rostami J (2008) Hard rock TBM cutterhead modeling for design and performance prediction. *Geomechanik und Tunnelbau* 1:18–28
- Rostami J (2013) Study of pressure distribution within the crushed zone in the contact area between rock and disc cutters. *International Journal of Rock Mechanics and Mining Sciences* 57:172–186
- Rostami J, Ozdemir L (1993) A new model for performance prediction of hard rock TBMs. In: *Rapid Excavation and Tunneling Conference RETC*, Boston, USA
- Rostami J, Ozdemir L, Nilsen B (1996) Comparison between CMS and NTH hard rock TBM performance prediction models. In: *Annual Technical Meeting of the Institute of Shaft Drilling and Technology (ISDT)*, pp 1–11
- Roxborough F, Phillips H (1975) Rock excavation by disc cutter. *Int J Rock Mech Min Sci Geomech Abstr* 12:361–366
- Sanio H (1985) Prediction of the performance of disc cutters in anisotropic rock. *International Journal of Rock Mechanics and Mining Sciences & Geomechanics* 22(3):153–161
- Sato K, F G, Itakura K (1991) Prediction of disc cutter performance using a circular rock cutting ring. In: *Proceedings 1st International Mine Mechanization and Automation Symposium*, Golden Colorado, USA
- Shenghua Y (2004) Simulation of rock cutting by the finite element method. In: *International ANSYS Conference Proceedings*, pp 61–71
- Stavropoulou M (2006) Modeling of small-diameter rotary drilling tests on marbles. *Int J Rock Mech Mining Sci* 43:1034–1051
- Su O, Akcin NA (2011) Numerical simulation of rock cutting using the discrete element method. *Int J Rock Mech Mining Sci* 48: 434–442
- Sun B, Guo W, Zhu D, Song L (2015) Multi-objective optimization design of tunnel boring machines edge cutter layout based on well-balanced wear. In: *The 14th IFToMM World Congress*, Taipei, Taiwan, October 25-30, 2015, DOI 10.6567/IFTToMM.14TH.WC.FA.024
- Tarkoy P (1983) Selecting used tunnel boring machines: the pros and cons. *Tunnels and Tunnelling* pp 20–25
- Wang Y, Tonon F (2010) Calibration of a discrete element model for intact rock up to its peak strength. *International Journal for Numerical and Analytical Methods in Geomechanics* 34:447–469
- van Wyk G, Els D, GAKdogan, S M Bradshaw, N Sacks (2014) Discrete element simulation of tribological interactions in rock cutting. *International Journal of Rock*

- Mechanics and Mining Sciences 65:8–19
- Xiao S, Belytschko T (2004) A bridging domain method for coupling continua with molecular dynamics. *Computer Methods in Applied Mechanics and Engineering* 193:1645–1669
- Yagiz S, Rostami J, Kim T, Ozdemir L, Merguerian C (2010) Factors influencing performance of hard rock tunnel boring machines. In *Rock Engineering in Difficult Ground Conditions – Soft Rocks and Karst*. Taylor & Francis Group
- Yang B, Jiao Y, Lei S (2006) A study on the effects of microparameters on macro-properties for specimens created by bonded particles. *Engineering Computations: International Journal for Computer-Aided Engineering and Software* 23(6):607–631
- Yu B, Khair A (2007) Numerical modeling of rock ridge breakage in rotary cutting. In: *ARMA General Meeting*, Vancouver, British Columbia, Canada
- Zhao K, Janutolo M, Barla G, Chen G (2014) 3D simulation of TBM excavation in brittle rock associated with fault zones: The Brenner Exploratory Tunnel case. *Engineering Geology* 181:93–111